


- Abreviaturas**
- X7: Conector enchufable
  - B: Bornero interno disyuntor SF
  - O1: Contactos auxiliares
  - YF: Bobina de cierre
  - M: Contacto in de carrera motor carga multiples
  - SE: Contacto disparo mantenido disyuntor
  - Y01: Primera bobina de disparo

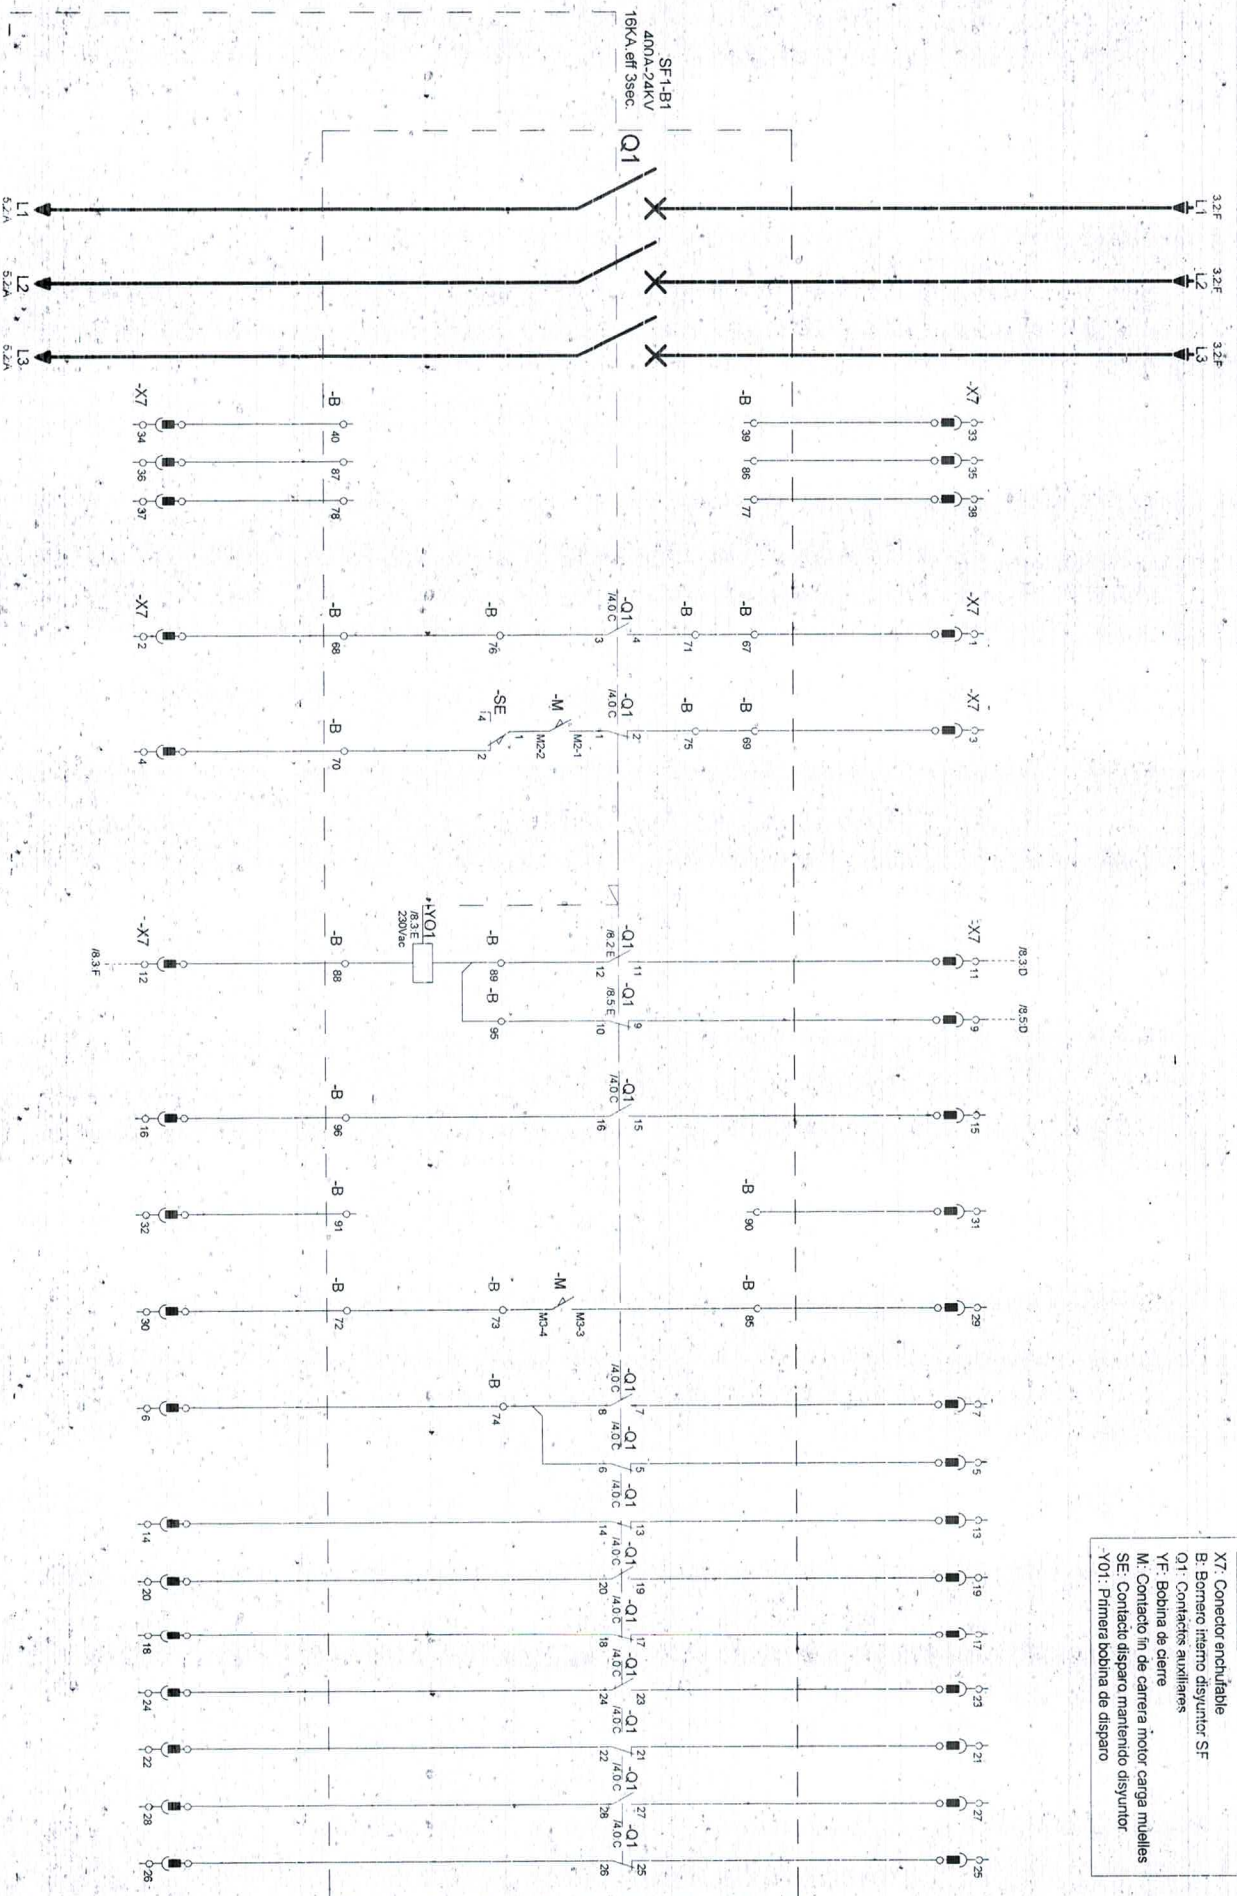

00	20/02/2023	Edición original	Rev./ Fecha	0	1	2	3	4	5	6	7	8	9
01	20/02/2023	Edición de revisión de proyecto	Rev./ Fecha	1	2	3	4	5	6	7	8	9	
<b>Schneider Electric</b>													
Nombre cliente: ---				Tipo de plano: ---				Referencia comercial: ---				Solución: ---	
Descripción proyecto: SME-24 kV CONFIGURADA				Descripción página: ---				Número de plano: ---				Hoja: ---	
Instalación: ---				Descripción producto: ---				Esquemas eléctricos: ---				Total: ---	
SEFAM 998				SEFAM 998				SEFAM 998				SEFAM 998	
GEK5760103				GEK5760103				GEK5760103				GEK5760103	
STO SCH													
SCH													
17													

The technical information contained in this document is the exclusive property of Schneider Electric and can not be used or disclosed to third parties of any kind without its written consent. Only the drawings and diagrams created at or under the company's responsibility are binding for execution. All devices shown in this document are in their original position. Check out with all existing instructions, brochures and all power sources etc.